



**DIPLOMAT™ ELITE CONCEALED TRAPWAY
RIGHT HEIGHT® ELONGATED COMPLETE TOILET
WITH INSULATED TANK
VITREOUS CHINA**

BARRIER FREE

**DIPLOMAT™ ELITE CONCEALED TRAPWAY
RIGHT HEIGHT® ELONGATED COMPLETE TOILET
WITH INSULATED TANK**

715AA.001

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- 305mm (12") rough-in
- 16-1/2" rim height for accessible applications
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Elongated siphon action jetted bowl with smooth-sided, concealed trapway
- 2-1/16" fully glazed trapway
- Generous 9" x 8" water surface area
- PowerWash® rim scrubs bowl with pressurized water every flush
- Oversized 3" flush valve
- Features **No Tools Installation**. Everything needed for toilet installation is included and can be hand tightened
- Chrome-plated trip lever
- Includes top mounting, plastic, Slow Close EverClean seat and telescoping cover which conceals seat ring when closed
- 2 color-matched bolt hole covers
- 100% factory flush tested
- Wax ring gasket with closet bolts
- Lifetime warranty on chinaware, 5 year warranty on all mechanical parts, and 1 year warranty on seat

Nominal Dimensions:

30-1/4" x 17-7/8" x 31"
(768 x 454 x 787mm)

Fixture, toilet seat, wax ring, and bowl bolts only.
Supply by others

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures



SEE REVERSE FOR ADDITIONAL ROUGHING-IN DIMENSIONS

To Be Specified:

- Color: White
- Supply with stop:

Special Order:

- Color: Bone Biscuit Onyx



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.




No Tools
Installation

EVERCLEAN®
Surface



DIPLOMAT™ ELITE CONCEALED TRAPWAY RIGHT HEIGHT® ELONGATED COMPLETE TOILET WITH INSULATED TANK VITREOUS CHINA

BARRIER FREE

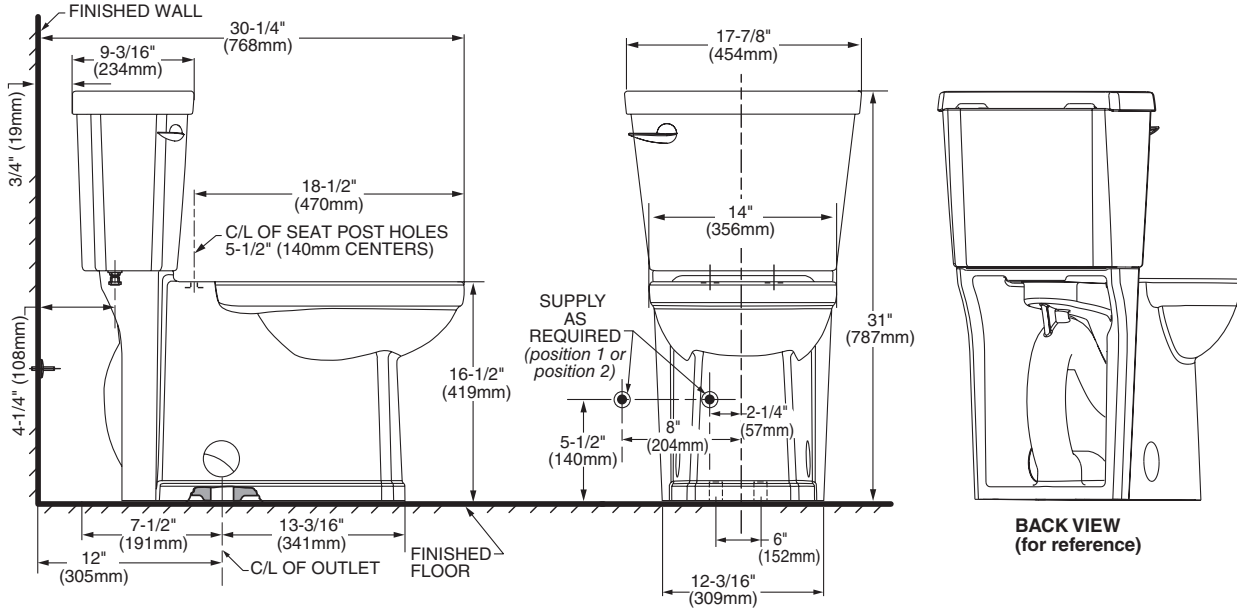

IMPORTANT: Water supply on the wall is required at 2-1/4" or 8" from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 4-1/2". In this case, check your supply and hose dimensions.

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.