

## GEMINI™ WHIRLPOOL AND SOAKING TUB

### **025-0143 Gemini™ Whirlpool**

- Three unique seating options
- Generous deck area
- Ten fully adjustable Clean Jets™
- Heater blank (heater purchased separately)
- Drop-in or under-mount installation
- Made in USA
- Limited Lifetime Warranty
- Durable acrylic construction
- Pre-leveled tub bottom
- Push button on/off switch

### **035-0143 Gemini™ Air Bath**

- Bath with gentle air bubble massage system
- Electronic control pad

### **045-0145 Gemini™ Whirlpool & Air Bath Combination**

- Same as 025-0143 plus Air Bath system
- Electronic control pad

### **015-0143 Gemini™ Soaking Tub**

#### **Nominal Dimensions:**

60" x 60" x 21-1/2"  
(1524 x 1524 x 546mm)

#### **Compliance Certifications - Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7/CSA B45.10
- IAPMO Z124.1.2

For color/finish availability and other faucet choices, please see [www.eljer.com](http://www.eljer.com)

\* **NOTE:** Whirlpool heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS



#### **To Be Specified - Required:**

- Color:
- Bath Filler: (specify finish)
- Bath Drain: (specify finish)


#### **Factory Installed - Options:**

- All models:
- Chromatherapy LED lights (3) with control pad - add "**K2**" suffix to model number
- Whirlpool and Air/Whirlpool combination models:
- Heater - add "**H**" suffix to model number
  - Heater and chromatherapy kit - add "**HK2**" suffix to model number (example: 025-0143**HK2**)

#### **Optional Accessories:**

- 494-8505 - Remote control for chromatherapy
- 494-1000 - In-line heater (field installed)
- 494-0080 - Attachable tile flange - cut to desired length

### MODEL 025-0143

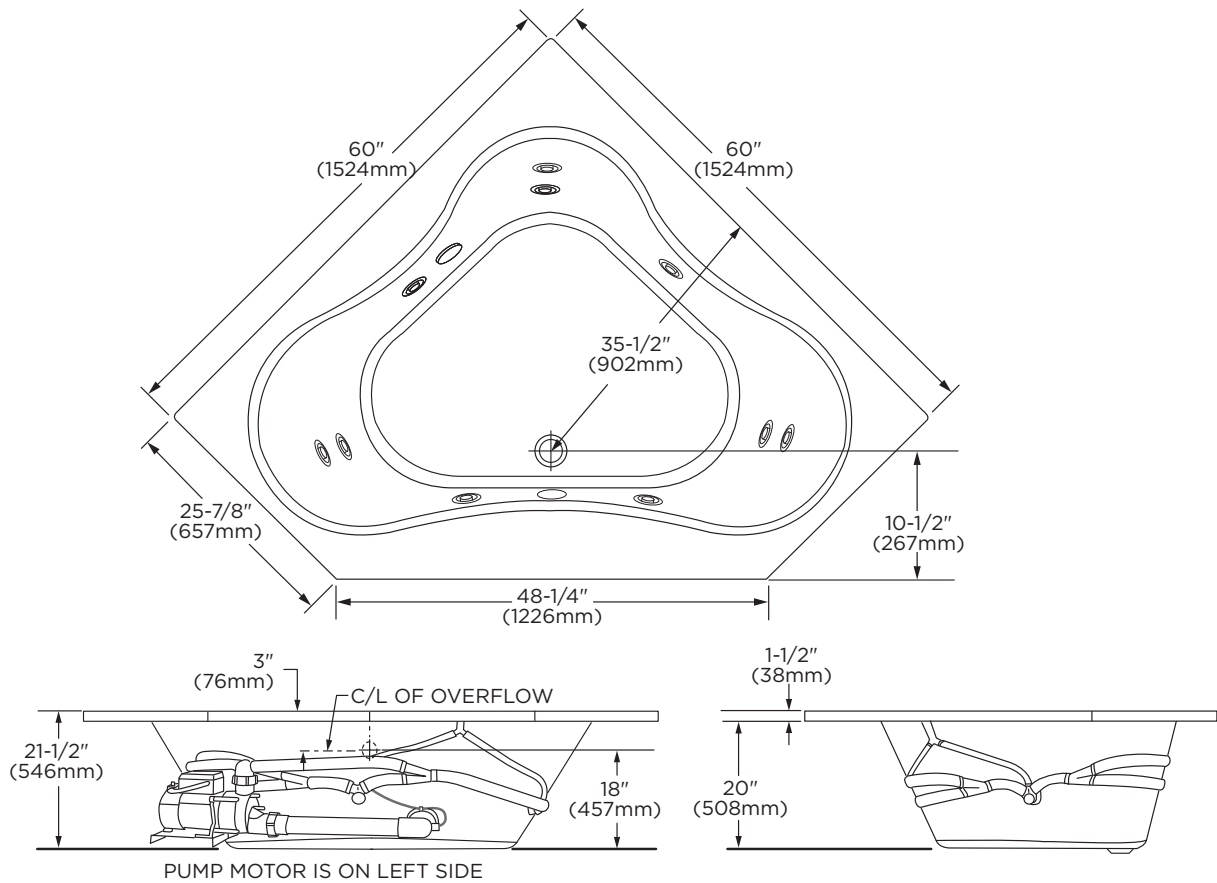

#### GENERAL SPECIFICATIONS FOR GEMINI™ WHIRLPOOL

INSTALLED SIZE	60 x 60 x 21-1/2 In. (1524 x 1524 x 546mm)
WEIGHT	130 Lbs. (59 Kg.)
WEIGHT w/WATER	863 Lbs. (392 Kg.)
GAL. TO OVERFLOW	88 Gal. (333 L)
BATHING WELL AT SUMP	31" X 44" (787 X 1118 mm)
WATER DEPTH TO OVERFLOW	17 In. (432mm)
FLOOR LOADING (PROJECTED AREA)	41 Lbs./Sq.Ft. (201 Kgs./Sq.m)
PTS.	30.56
CUBE (FT <sup>3</sup> )	50.75

#### NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

OPTIONAL 3 WALL TILE FLANGE KIT AVAILABLE AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by IAPMO Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.