
PELHAMTM



SINGLE CONTROL BATH/SHOWER WITH DIVERTER SPOUT



9385.502.002 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

Bath/shower Trim Kit with Metal wall escutcheon, Slip-on diverter tub spout. Metal lever handle. "Easy Clean" Showerhead with 2.5 gpm/9.5L/min. maximum flow.

ROUGH VALVE BODY

Cast brass body, washerless 47mm ceramic disc valve cartridge with volume and temperature control, and hot limit safety stop. Pressure balancing cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressure. One-half inch inlets and outlets (choice of direct sweat, threaded, or PEX). Available with screwdriver stops. Rough-in plaster guard designed for use as thin-wall mounting adaptor. Valve body will accept a variety of decorative Bath/Shower trim kits.

MODEL NUMBER:

TRIM KITS:

- 9385.502.002 Pelham BATH/SHOWER Trim Kit Metal Escutcheon. Metal Lever Handle. "Easy Clean" Showerhead. Slip-on Diverter Tub Spout. LESS Valve Body. Chrome finish.
- 9385.502.295 Pelham BATH/SHOWER Trim Kit Metal Escutcheon. Metal Lever Handle. "Easy Clean" Showerhead. Slip-on Diverter Tub Spout. LESS Valve Body. Satin Nickel (PVD) finish.

ROUGH VALVES: (Volume and temperature control.)

- R120 Pressure Balance Rough Valve Body only Direct sweat inlets/outlets. LESS trim.
- R120SS Pressure Balance Rough Valve Body only with Screwdriver stops Direct sweat inlets/outlets. Screwdriver stops. LESS trim.
- R125 Pressure Balance Rough Valve Body only Female thread inlets/outlets. LESS trim.
- R125SS Pressure Balance Rough Valve Body only with Screwdriver stops
 Female thread inlets/outlets. Screwdriver stops. LESS trim.
- **R127 Pressure Balance Rough Valve Body only** PEX inlets/Direct sweat outlets. LESS trim.
- R127SS Pressure Balance Rough Valve Body only with Screwdriver stops

PEX inlets/Direct sweat outlets. Screwdriver stops. LESS trim.

PRODUCT FEATURES:

Cast Brass Valve Body: Durable - Quality that will last a lifetime. Ideal material for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance. Allows easy fine tuning of temperature (125° handle rotation from off to hot).

Pressure Balancing Valve Cartridge: Maintains constant output temperature in response to changes in hot and cold supply pressure. Diaphragm system engineered to eliminate cross flow. Avoids failure due to mineral deposits - ideal for use in hard water

Back-to-Back Capability: Hot and cold can be reversed quickly and easily.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Plaster Guard: Plaster guard is designed to protect valve during installation and serve as a mounting plate for thin-wall installations. 2 piece design allows valve to be tested prior to trim installation.

Wide Rough-in Range: From 1-5/8" to 3-1/4".


SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature with 2.5 gpm/9.5L/min. maximum flow rate. Shall feature a cast brass body. Shall feature ceramic disc valve cartridge which is capable of back-to-back installation. Fitting shall be equipped with pressure balancing cartridge engineered to eliminate cross flow and avoid failure due to mineral deposits. Shall also feature hot limit safety stop. Fitting shall be: Rough Valve Body - Model # R11_____, Trim Kit - Eljer Model # 9077.502.____.




PELHAMTM

SINGLE CONTROL BATH/SHOWER WITH DIVERTER SPOUT

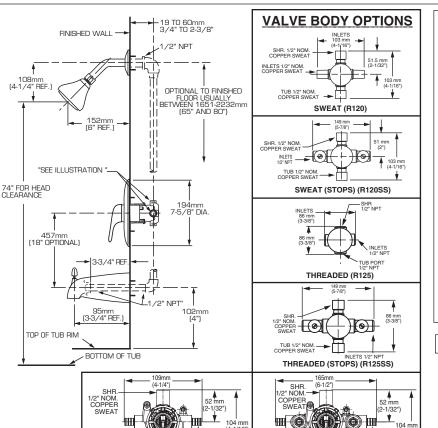

1/2" PEX INLETS (ASTM F1807)

PEX (R127)



CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASSE 1016 ASME A112.18.1 CSA B 125

• Showerhead with 2.5 gpm/9.5L/min. flow restrictor.

Ė

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

*			Finish Options	
(TS	Product		Polished Chrome	Satin Nickel
5	Number	Description	002	295
TRII	9385.502	Bath/Shower Trim Kit. Metal Lever Handle. Slip-on Spout. Showerhead. LESS Valve Body. "Easy Clean" Showerhead.		

PEX (STOPS) (R127SS)

1/2" PEX INLETS (ASTM F1807)

DIES	Product Number	Description
ВО	R120	Rough Valve Body less trim. Direct Sweat inlets/outlets.
VE.	R120SS	Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops.
\AL	R125	Rough Valve Body less trim. Female Thread inlets/outlets.
Ŧ	R125SS	Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops.
5 DC	R127	Rough Valve Body less trim. PEX inlets/ Direct Sweat outlets.
R	R127SS	Rough Valve Body less trim. PEX inlets/ Direct Sweat outlets with Screwdriver Stops.

^{*} TRIM & ROUGH MUST BE ORDERED SEPARATELY.