



# CLARION™

## SINGLE CONTROL BATH/SHOWER

### WITH DIVERTER SPOUT



9077.502.002 Bath/Shower Trim Shown

#### MODEL NUMBER:

#### TRIM KITS:

- ❑ **9077.502.002 Clarion BATH/SHOWER Trim Kit**  
Lever Handle. 5" adjustable Showerhead. IPS Diverter Spout. LESS Valve Body. Chrome finish.
- ❑ **9077.502.295 Clarion BATH/SHOWER Trim Kit**  
Lever Handle. 5" adjustable Showerhead. IPS Diverter Spout. LESS Valve Body. Satin Nickel (PVD) finish.

#### ROUGH VALVES: (Temperature control)

- ❑ **R110 Pressure Balance Rough Valve Body only**  
Direct sweat inlets/outlets. LESS trim.
- ❑ **R110SS Pressure Balance Rough Valve Body only with Screwdriver stops**  
Direct sweat inlets/outlets. Screwdriver stops. LESS trim.
- ❑ **R115 Pressure Balance Rough Valve Body only**  
Female thread inlets/outlets. LESS trim.
- ❑ **R115SS Pressure Balance Rough Valve Body only with Screwdriver stops**  
Female thread inlets/outlets. Screwdriver stops. LESS trim.
- ❑ **R117 Pressure Balance Rough Valve Body only**  
PEX inlets/Direct sweat outlets. LESS trim.
- ❑ **R117SS Pressure Balance Rough Valve Body only with Screwdriver stops**  
PEX inlets/Direct sweat outlets. Screwdriver stops. LESS trim.

#### GENERAL DESCRIPTION:

##### TRIM KIT

Bath/shower with a classic retro style with porcelain accents. Cast brass diverter spout with 1/2" I.P.S. connection. Metal wall escutcheon. Porcelain lever handle. 5" adjustable showerhead with 2.5gpm/9.5L/min. max. flow.

##### ROUGH VALVE BODY

Cast brass body, washerless ceramic disc valve cartridge with back to back capability, and hot limit safety stop. Cycles from "off" to "cold" to "hot". Pressure balancing cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressure. 1/2" inlets and outlets (choice of direct sweat, threaded, or PEX). Available with screwdriver stops. Rough-in plaster guard designed for use as thin-wall mounting adaptor.

#### PRODUCT FEATURES:

**Showerhead:** 5" adjustable showerhead with 2.5gpm/9.5max flow.

**Cast Brass Valve Body:** Durable - Quality that will last a lifetime. Ideal material for prolonged contact with water.

**Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance. Allows easy fine tuning of temperature (125° handle rotation from off to hot).

**Pressure Balancing Valve Cartridge:** Maintains constant output temperature in response to changes in hot and cold supply pressure. Diaphragm system engineered to eliminate cross flow. Avoids failure due to mineral deposits - ideal for use in hard water.

**Back-to-Back Capability:** Hot and cold can be reversed quickly and easily.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Exclusive Plaster Guard:** Plaster guard is designed to protect valve during installation and serve as a mounting plate for thin-wall installations. 2 piece design allows valve to be tested prior to trim installation.

**Wide Rough-in Range:** From 1-5/8" to 3-1/4".




#### SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature with 2.5 gpm/9.5L/min. maximum flow rate. Shall feature a cast brass body. Shall feature ceramic disc valve cartridge which is capable of back-to-back installation. Fitting shall be equipped with pressure balancing cartridge engineered to eliminate cross flow and avoid failure due to mineral deposits. Shall also feature hot limit safety stop. Fitting shall be: Rough Valve Body # R11\_\_\_\_, Trim Kit - Eljer Model # 9077.502.\_\_\_\_.



# CLARION™

## SINGLE CONTROL BATH/SHOWER WITH DIVERTER SPOUT

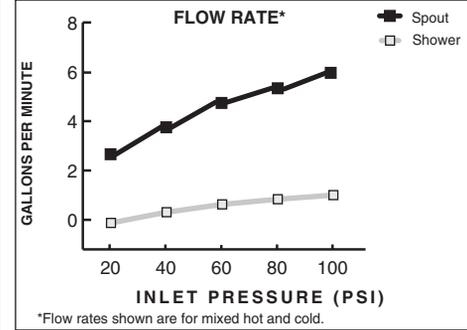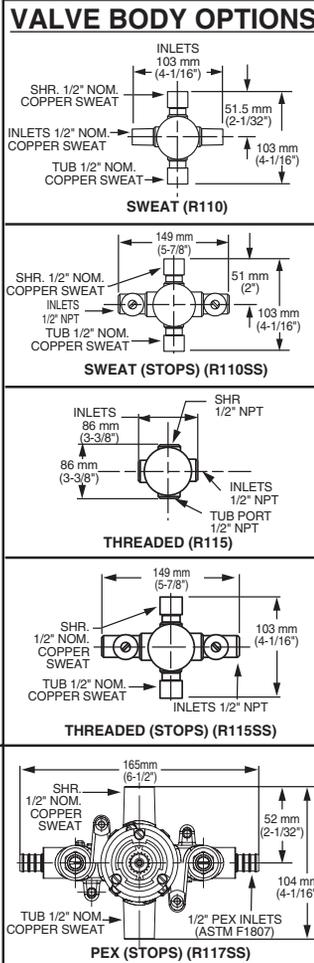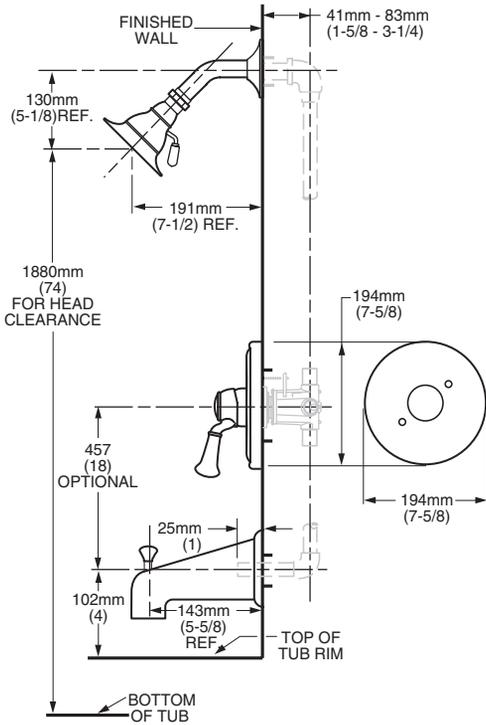

### CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASSE 1016
- ASME A112.18.1
- CSA B 125

• Showerhead with 2.5 gpm/9.5L/min. flow restrictor.



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

TRIM KITS *	Product Number	Description	Finish Options	
			Polished Chrome	Satin Nickel
			002	295
9077.502	Bath/Shower Trim Kit. Lever Handle. 5" Adjustable Showerhead. LESS Valve Body.			

ROUGH VALVE BODIES	Product Number	Description
	R110	Rough Valve Body less trim. Direct Sweat inlets/outlets.
	R110SS	Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops.
	R115	Rough Valve Body less trim. Female Thread inlets/outlets.
	R115SS	Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops.
	R117	Rough Valve Body less trim. PEX inlets/ Direct Sweat outlets.
	R117SS	Rough Valve Body less trim. PEX inlets/ Direct Sweat outlets with Screwdriver Stops.

\* TRIM & ROUGH MUST BE ORDERED SEPARATELY.